




Product Service

CERTIFICATE

No. Z2 099333 0063 Rev. 08

Holder of Certificate: **LONGi Green Energy Technology Co., Ltd.**
No. 388, Middle Hangtian Road
Chang'an District
710100 Xi'an City, Shaanxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

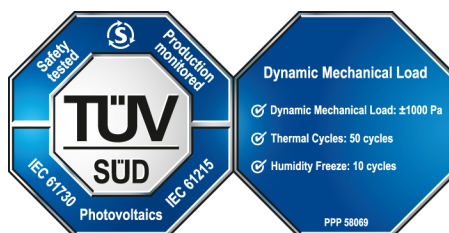

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061802060-08

Valid until: 2028-10-16

Date, 2023-10-17

(Zhulin Zhang)

CERTIFICATE

No. Z2 099333 0063 Rev. 08

Model(s):

LR6-72HBD-xxxM, (xxx=360 to 395 in step of 5)
LR6-60HBD-xxxM, (xxx=300 to 325 in step of 5)
LR6-78HBD-xxxM, (xxx=395 to 410 in step of 5)
LR6-72OPD-xxxM, (xxx=370 to 410 in step of 5)
LR6-60OPD-xxxM, (xxx=325 to 345 in step of 5)
LR4-72HBD-xxxM, (xxx=415 to 455 in step of 5)
LR4-60HBD-xxxM, (xxx=345 to 375 in step of 5)
LR5-72HBD-xxxM, (xxx=500 to 565 in step of 5)
LR5-72HBD-xxxMa, (xxx=500 to 565 in step of 5)
LR5-72HBD-xxxMc, (xxx=500 to 565 in step of 5)
LR5-72HBD-HD-xxxM, (xxx=500 to 565 in step of 5)
LR5-72HIBD-xxxM, (xxx=500 to 565 in step of 5)
LR5-66HBD-xxxM, (xxx=475 to 515 in step of 5)
LR5-66HIBD-xxxM, (xxx=475 to 515 in step of 5)
LR5-72HTD-xxxM, (xxx=550 to 600 in step of 5)
LR5-54HBD-xxxM, (xxx=390 to 425 in step of 5)
LR5-54HIBD-xxxM, (xxx=390 to 425 in step of 5)
LR5-72HGD-xxxM, (xxx=540 to 590 in step of 5)
LR5-78HBD-xxxM, (xxx=570 to 605 in step of 5)
LR7-72HGD-xxxM, (xxx=585 to 605, in step of 5)
xxx is standing for the rated power at STC

Parameters:

Fire Safety Class: Class C according to UL790.
Safety Class: Class II
Max. System Voltage: 1500V DC
Construction: Framed, with Junction box,
cable and connector.

Remark: The test method is referred to IEC TS 62782:2016.

Tested according to:

IEC 61215-1:2016
IEC 61215-2:2016
IEC 61215-1-1:2016
IEC 61730-1:2016
IEC 61730-2:2016
PPP 58069A:2013